



**F44AC CN15W-  
PS65**



### TOOL FEATURES

- Switchable trigger for single shot and bump fire
- Tool-free depth of drive adjustment

### 15° WIRE COIL NAILS 15° PLASTIC SHEET COIL

- Can be provided in standard steel or stainless steel A2 or A4
- Available as bright, electro-galvanized, hot-dipped or coppered version
- Can be delivered in smooth, ring, screw or knurled version



### CONTACT & SERVICE

Our sales team  
is available at:

P +43 7724 2111-671  
sales.int@beck-fastening.com  
www.beck-fastening.com

### DESCRIPTION

- Easy to handle thanks to its light weight and good balance
- Drives both wire welded and plastic sheet coil nails
- Fully pneumatic feeding and positioning system allows precise nailing
- Rubber comfort grip and adjustable exhaust
- Removable no mar tip

# F44AC CN15W-PS65

## APPLICATIONS

- Siding
- Fencing
- Subflooring
- Decking
- Roof joists
- Garden furniture
- Boxes and crates

## HANDLING

1. Adjust magazine plate to nail length
2. Position first nail in nose channel and align top nails with upper edge loading channel
3. Connect air supply
4. Avoid a dry or dirty tool by lubricating respectively cleaning regularly

## TOOL CHARACTERISTICS

Height	Width
322 mm	130 mm
12.67 inch	5.12 inch
Length	Weight
275 mm	2,40 kg
10.82 inch	5.29 lbs

### Pressure

5 - 8 bar | 70 - 120 psi

### Air consumption per shot

1.20 L. | 0.042 SCF

Performance at 90 psi | 6.2 bar  
(0.62 MPa)

## NOISE VALUE

(EN 12549+A1 : 2008, EN ISO 4871 : 2009)

$L_{WA,1s}$  : 92.02 dB (A) -  $K_{WA,1s}$  , 2.5

$L_{pA,1s}$  : 81.50 dB (A) -  $K_{pA,1s}$  , 2.5

## VIBRATION VALUE

(UNI ISO/TS 8662-11)

3.47 m/s<sup>2</sup>

## ACTUATION & LOADING

Actuation System: Single Shot  
& Contact Actuation

Loading: Coil


## VARIATIONS

F44AC CN15W-PS65 SCR

## FASTENER DATA

### NAILS

	Wire	Plastic
Diameter	2.10 - 2.50 mm   0.083 - 0.099"	
Shank	smooth   ring   screw   knurled	
Pitch	7 - 8 mm   0.275 - 0.314"	7.50 mm   0.295"
Head	5 - 6 mm   0.197 - 0.236"	
Length	25 - 65 mm   1 - 2 ½"	32 - 65 mm   1 ¼ - 2 ½"
Magazine Capacity	250 - 400	200
Nail Type	15° Wire Coil Nails 15° Plastic Sheet Coil Nails (CN-AG)	

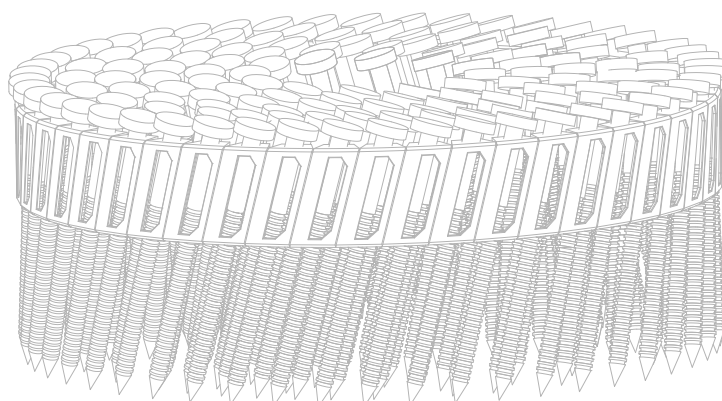

Changes and errors excepted. All rights reserved.

FASCO® is a registered trademark of the RAIMUND BECK KG.

Torx®, Phillips® and Pozi (PoziDrive®) are all trademarks of their respective owners.

**VERSION**  
**04/2023 EN**