



TOOL- FEATURES

- Copyright-protected product design for enhanced ergonomics and reduced recoil
- Tool-free jam clearing mechanism provides an easy access to the nose if the staple should jam
- Easy reloading through direct opening of the magazine guide rail

HEAVY DUTY STAPLES

- Standard version with CE certification according to EN 14592
- Higher static load capacity certified by ETA 17/0777
- ETA staples feature the patented BECK DIAMOND COATING and can therefore resist temperatures up to 60°C



CONTACT & SERVICE

**Our customer service
is happy to assist you.**

P +43 7724 2111-671
sales.int@beck-fastening.com
www.beck-fastening.com

DESCRIPTION

The FASCO® F47C B7/G-65 stapler impresses with its ergonomic design and reduced recoil. A tool-free mechanism allows for easy removal of jammed staples, facilitating quick reloading. The comfort grip minimizes vibrations for a secure and comfortable hold. Additional features include an adjustable air exhaust, our powerful FASCO® contact trigger, and a depth adjustment dial for precise driving depth. Thanks to its robust design, the F47C B7/G-65 stapler is particularly suited for demanding applications.

F47C B7/G-65

APPLICATIONS

- Sheathing
- Subflooring
- Roof decking
- Furniture frames
- Pallets
- Vinyl siding
- Crates
- Box assembly
- Drywall

HANDLING

1. Load fastener from the top into the magazine
2. Connect air supply
3. Avoid a dry or dirty tool by lubricating respectively cleaning regularly

TOOL CHARACTERISTICS

Height	Width
350 mm	95 mm
13.78 inch	3.74 inch
Length	Weight
390 mm	2,88 kg
15.35 inch	6.34 lbs

Pressure

5 - 8 bar | 70 - 120 psi

Air consumption per shot

1.45 L. | 0.051 SCF

Performance at 90 psi | 6.2 bar
(0.62 MPa)

FASTENER DATA

Outside Crown	11,30 mm 0.444"
Inside Crown	7,60 mm 0.299"
Diameter	1,40 - 1,60 mm 0.055 - 0.062"
Length	25 - 65 mm 1 - 2 1/2"
Magazine Capacity	128
Staple Type	BECK G 5562, BECK KG 700, BECK 6600
Similar to	SENCO® N (=G5562), ATRO® 100, BEA® 14/155, Haubold® KG700

NOISE VALUE

(EN 12549+A1 : 2008, EN ISO 4871 : 2009)

$L_{WA,1s}$: 104.90 dB (A) - $K_{WA,1s}$, 2.5

$L_{pA,1s}$: 92.40 dB (A) - $K_{pA,1s}$, 2.5

VIBRATION VALUE

(UNI ISO/TS 8662-11)

4.24 m/s²

ACTUATION & LOADING

Actuation System:

Contact actuation


Loading: Top Loading

VARIATIONS

- F44AC G-50 TL STAPLER

FURTHER INFORMATION

Also available with ETA
certification.

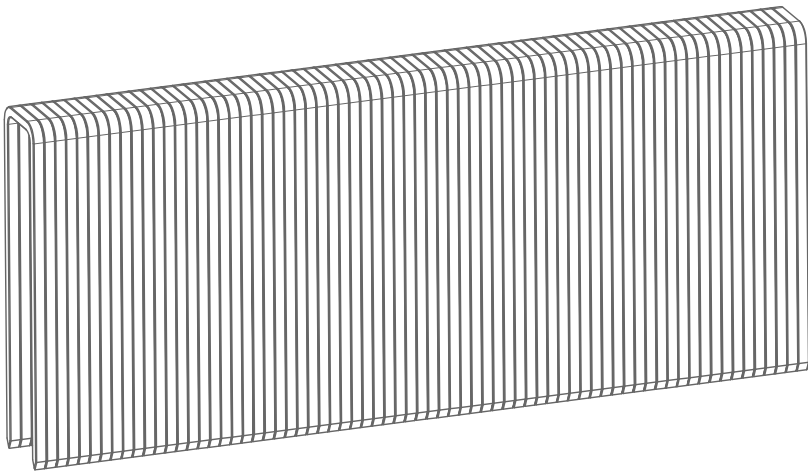

Changes and errors excepted. All rights reserved.

FASCO® is a registered trademark of the RAIMUND BECK KG.

SENCO®, ATRO®, BEA® and Haubold® are all trademarks of their respective owners.

VERSION
10/2024 EN