



**F47C B7/G-65**



## TOOLFEATURES

- Copyright-protected product design for enhanced ergonomics and reduced recoil
- Tool-free jam clearing mechanism provides an easy access to the nose if the staple should jam
- Easy reloading through direct opening of the magazine guide rail

## HEAVY DUTY STAPLES

- Standard version with CE certification according to EN 14592
- Higher static load capacity certified by ETA 17/0777
- ETA staples feature the patented BECK DIAMOND COATING and can therefore resist temperatures up to 60°C



## CONTACT & SERVICE

Our sales team  
is available at:

P +1 800 239 8665  
sales@beck-america.com  
www.beck-america.com

## DESCRIPTION

The FASCO® F47C B7/G-65 stapler impresses with its ergonomic design and reduced recoil. A tool-free mechanism allows for easy removal of jammed staples, facilitating quick reloading. The comfort grip minimizes vibrations for a secure and comfortable hold. Additional features include an adjustable air exhaust, our powerful FASCO® contact trigger, and a depth adjustment dial for precise driving depth. Thanks to its robust design, the F47C B7/G-65 stapler is particularly suited for demanding applications.

# F47C B7/G-65

## APPLICATIONS

- Sheathing
- Subflooring
- Roof decking
- Furniture frames
- Pallets
- Vinyl siding
- Crates
- Box assembly
- Drywall

## HANDLING

1. Load fastener from the top into the magazine
2. Connect air supply
3. Avoid a dry or dirty tool by lubricating respectively cleaning regularly

## TOOL CHARACTERISTICS

Height	Width
350 mm	95 mm
13.78 inch	3.74 inch
Length	Weight
390 mm	2,88 kg
15.35 inch	6.34 lbs

### Pressure

5 - 8 bar | 70 - 120 psi

### Air consumption per shot

1.45 L. | 0.051 SCF

Performance at 90 psi | 6.2 bar  
(0.62 MPa)

## FASTENER DATA

Outside Crown	11.30 mm   0.444"
Inside Crown	7.60 mm   0.299"
Diameter	1.40 - 1.60 mm   0.055 - 0.062"
Length	25 - 65 mm   1 - 2 1/2"
Magazine Capacity	128
Staple Type	BECK G 5562, BECK KG 700, BECK 6600
Similar to	SENCO® N (=G5562), ATRO® 100, BEA® 14/155, Haubold® KG700

## NOISE VALUE

(EN 12549+A1 : 2008, EN ISO 4871 : 2009)

$L_{WA,1s}$  : 104.90 dB (A) -  $K_{WA,1s}$  , 2.5

$L_{pA,1s}$  : 92.40 dB (A) -  $K_{pA,1s}$  , 2.5

## VIBRATION VALUE

(UNI ISO/TS 8662-11)

4.24 m/s<sup>2</sup>

## ACTUATION & LOADING

Actuation System:

Contact actuation


Loading: Top Loading

## VARIATIONS

- F44AC G-50 TL STAPLER

## FURTHER INFORMATION

Also available with ETA certification.

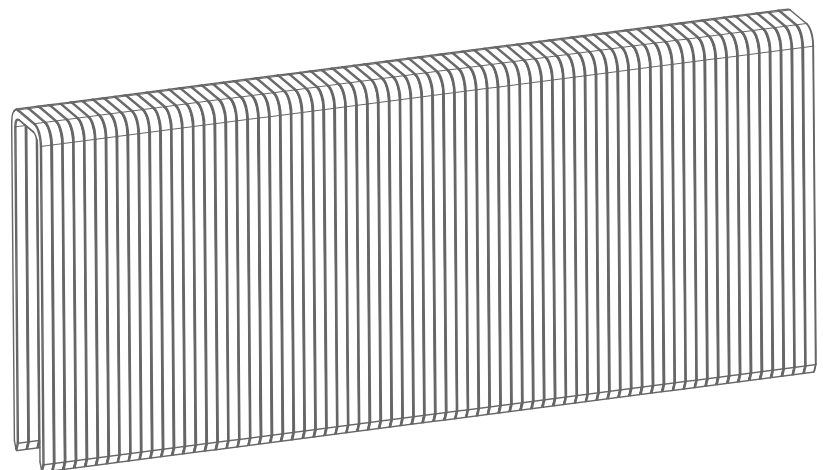

Changes and errors excepted. All rights reserved.

FASCO® is a registered trademark of the BECK Fastening GmbH

SENCO®, ATRO®, BEA® and Haubold® are all trademarks of their respective owners.

**VERSION**  
**02/2026 US**