


1) TOOL TYPE - GERAETETYP - DESCRIZIONE MACCHINA - TYPE D'OUTIL - TIPO DE MAQUINA
cod. 11609.02 F58AC CN-80 SUBLOC® PRO SCRAIL®



2) TOOL CHARACTERISTICS
SPEZIFIKATION DES GERAETES
CARATTERISTICHE TECNICHE
CARACTÉRISTIQUES DE L'OUTIL
CARACTERÍSTICAS DE LA MAQUINA

HEIGHT HOEHE ALTEZZA HAUTEUR ALTURA	WIDTH BREITE LARGHEZZA LARGEUR ANCHURA	LENGTH LAENGE LUNGHEZZA LONGUEUR LONGITUD	WEIGHT GEWICHT PESO POIDS PESO
in. 14.37 mm. 365	in. 5.12 mm. 130	in. 12.20 mm. 310	lbs. 8.48 kg. 3.850
MIN-MAX WORKING PRESSURE MIN-MAX ARBEITSDRUCK MIN-MAX PRESSIONE DI ESERCIZIO MIN-MAX PRESSION DE TRAVAIL MIN-MAX PRESION DE TRABAJO		70 / 120 psi 5 / 8 BAR	
AIR CONSUMPTION PER CYCLE LUFTVERBRAUCH PRO NAGELUNG CONSUMO ARIA PER COLPO CONSUMATION DE L'AIRE PAR COUP CONSUMO DE AIRE CADA DISPARO		PERFORMANCES AT 90 psi (0.62 MPa) PRESTAZIONI A 6.2 BAR (0.62 MPa) 0.066 SCF 1.86 L.	
LUBRICANT SCHMIERÖL LUBRIFICANTE LUBRIFIANT LUBRIFICANTE		AEROSPACE LUBRICANTS TRIBOLUBE 12	

* ACTUATION SYSTEM * AUSLÖSEART * ATTUAZIONE * MISE EN ŒUVRE * ACTUACIÓN	CONTACT ACTUATION
--	-------------------

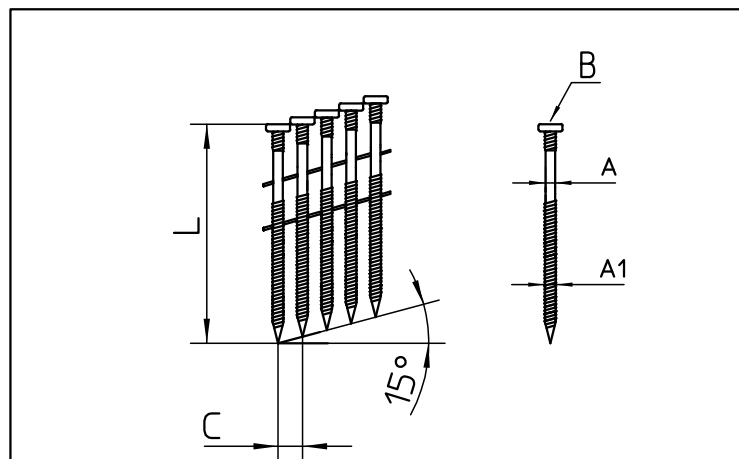

3) FASTENER DATA
ANGABEN ZU DEN BEFESTIGUNGSMITTELN
CARATTERISTICHE TECNICHE FISSAGGI
DONNÉES DES PROJECTILES
DATOS DE CLAVOS

A / A1) WIRE SCHAFT FILO ALAMBRE TIGE		in. 0.110 - 0.126 mm. 2.8 - 3.2		
B) HEAD KOPF TESTA TÊTE CABEZA		TORX 15		
C) PITCH TEILUNG PASSO PAS PASO		in. 0.315 mm. 8.0		
L) LENGTH LAENGE LUNGHEZZA LONGUEUR LONGITUD		} MIN-MAX	mm.	in.
			57	2 1/4"
			63	2 9/16"
		75	3"	
MAGAZINE CAPACITY MAGAZIN CAPAZITÄT CAPACITA' CARICATORE CAPACITE' CHARGEUR CAPACIDAD CARGADOR		200/300 nails		

* LOADING * LADEN * CARICAMENTO * CHARGEUR * CARGA	BOTTOM LOADING SIDE LOADING TOP LOADING ● COIL OTHER
--	--

* SEE INSTRUCTION MANUAL - SIEHE BETRIEBSANLEITUNG - VEDI MANUALE - VOIR MODE D'EMPLOI - VER EL MANUAL

NOISE CHARACTERISTICS
GERÄUSCH - EMISSION DATEN
CARATTERISTICHE RUMOROSITÀ
CARACTÉRISTIQUES ACOUSTIQUE
CARACTERÍSTICAS DE RUIDO

EN 12549+A1:2008 $L_{WA,1s}$: 101.00 dB(A) - $K_{WA,1s}$, 2.5
EN ISO 4871:2009 $L_{pA,1s}$: 94.00 dB(A) - $K_{pA,1s}$, 2.5

VIBRATION VALUE
VIBRATIONSWERT
VALORE DI VIBRAZIONE
VALEUR DE VIBRATION
VALOR DE VIBRACIÓN

UNI ISO/TS 8662-11 m/s^2 3.63