


1) TOOL TYPE - GERAETETYP - DESCRIZIONE MACCHINA - TYPE D'OUTIL - TIPO DE MAQUINA

cod.R31826

HEAD CN15W-PS90 SCR
ES MAG BRACKET COVER

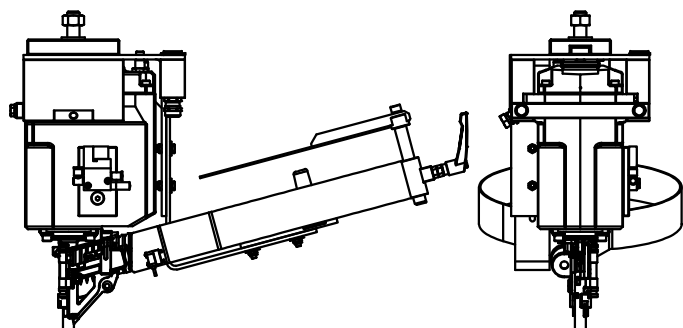

2) TOOL CHARACTERISTICS
SPEZIFIKATION DES GERAETES
CARATTERISTICHE TECNICHE
CARACTÉRISTIQUES DE L'OUTIL
CARACTERÍSTICAS DE LA MAQUINA

HEIGHT - HAUTEUR HOEHE - ALTURA ALTEZZA	WIDTH - LARGEUR BREITE - ANCHURA LARGHEZZA	LENGTH - LONGUEUR LAENGE - LONGITUD LUNGHEZZA	WEIGHT - POIDS GEWICHT - PESO PESO
in.16.46 mm. 418	in.10.43 mm. 265	in.23.62 mm. 600	lbs.34.17 kg.15.500
MIN-MAX WORKING PRESSURE MIN-MAX ARBEITSDRUCK MIN-MAX PRESSIONE DI ESERCIZIO MIN-MAX PRESSION DE TRAVAIL MIN-MAX PRESION DE TRABAJO		70 / 120 psi 5 / 8 BAR	
AIR CONSUMPTION PER CYCLE LUFTVERBRAUCH PRO NAGELUNG CONSUMO ARIA PER COLPO CONSUMATION DE L'AIRE PAR COUP CONSUMO DE AIRE CADA DISPARO		PERFORMANCES AT 90 psi (0.62 MPa) PRESTAZIONI A 6.2 BAR (0.62 MPa) 0.145 SCF 4.10 L.	
LUBRICANT SCHMIEROEL LUBRIFICANTE LUBRIFIANT LUBRIFICANTE		AEROSPACE LUBRICANTS TRIBOLUBE 12	

* ACTUATION SYSTEM * AUSLÖSEART * ATTUAZIONE * MISE EN ŒUVRE * ACTUACIÓN	0	* LOADING * LADEN * CARICAM. * CHARGER * CARGA	BOTTOM LOADING SIDE LOADING TOP LOADING COIL OTHER
--	---	--	--

* SEE INSTRUCTION MANUAL - SIEHE BETRIEBSANLEITUNG
- VEDI MANUALE - VOIR MODE D'EMPLOI - VER EL MANUAL

NOISE CHARACTERISTICS GERÄUSCH - EMISSION DATEN CARATTERISTICHE RUMOROSITA' CARACTÉRISTIQUES ACOUSTIQUE CARACTERÍSTICAS DE RUIDO	EN 12549+A1:2008 EN ISO 4871:2009
$L_{WA,1s}$: 98.38 dB(A) - $K_{WA,1s}$, 2.5	
$L_{pA,1s}$: 93.0 dB(A) - $K_{pA,1s}$, 2.5	

VIBRATION VALUE VIBRATIONSWERT VALORE DI VIBRAZIONE VALEUR DE VIBRATION VALOR DE VIBRACIÓN	
--	--

3) FASTENER DATA
ANGABEN ZU DEN BEFESTIGUNGSMITTELN
CARATTERISTICHE TECNICHE FISSAGGI
DONNÉES DES PROJECTILES
DATOS DE CLAVOS

SCRAIL®				
			SHANK	
			- FINE - COARSE - STEEL THREAD	
		WIRE		PLASTIC
		MIN	MAX	MIN MAX
A-B) WIRE SCHAFT FILO ALAMBRE TIGE	in mm	.113-.150 2.8- 3.8		.113-.134 2.8- 3.4
C) HEAD KOPF TESTA TETE CABEZA		STAR / TORX VERSA SQUARE PHILIPS POZI		
L) LENGTH LAENGE LUNGHEZZA LONGEUR LONGITUD	in mm	2' - 3 1/2' 50 - 90		
MAGAZINE CAPACITY MAGAZIN CAPAZITAET CAPACITA' CARICATORE CAPACITE' CHARGEUR CAPACIDAD CARGADOR		DIAMETER 260 mm		

NAIL				
			SHANK	
			- SMOOTH - RING - SCREW - KNURLED	
		WIRE		PLASTIC
		MIN	MAX	MIN MAX
A) WIRE - SCHAFT FILO - ALAMBRE TIGE	in mm	.099 -.150 2.5 - 3.8		.099 -.122 2.5 - 3.1
B) PITCH - TEILUNG PASSO - PAS PASO	in mm	.315 8.0		.295 7.5
C) HEAD - KOPF TESTA - TETE CÂBEZA	in mm	.216 -.279 5.5 - 7.1		
L) LENGTH-LAENGE LUNGH.-LONGEUR LONGITUD	in mm	1 3/4'-3 1/2' 45 - 90		
MAGAZINE CAPACITY MAGAZIN CAPAZITAET CAPACITA' CARICATORE CAPACITE' CHARGEUR CAPACIDAD CARGADOR		DIAMETER 260 mm		