




**B LIGNOLOC®**  
A BECK brand

# INSTALLATION OF FAÇADE BOARDS

WITH LIGNOLOC®  
WOODEN NAILS WITH HEAD

## INSTALLATION OF FAÇADE BOARDS WITH LIGNOLOC® WOODEN NAILS WITH HEAD

# APPLICATION RECOMMENDATIONS

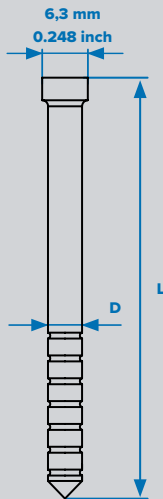

### Dimensions of façade board:

**Thickness:** ~20mm

**Materials:**

Spruce, Pine, Fir, Larch

**Orientation of annual rings:**

horizontal

**Substructure:**

**Thickness:** at least 40 mm

**Width:** - at least 65 mm  
(maintain edge distances on both sides)

**Materials:**

Spruce, Pine

**Note:**

- + The prescribed penetration depth is 8 x nail diameter = 37,6mm
- + Penetration of the substructure leads to a strong reduction of the pull-out forces


**L LIGNOLOC® F60 WOODEN NAIL WITH HEAD**

58 mm | 2 5/16 inch

64 mm | 2 1/2 inch

78 mm | 3 inch

**D** 4,7 mm | 0.185 inch

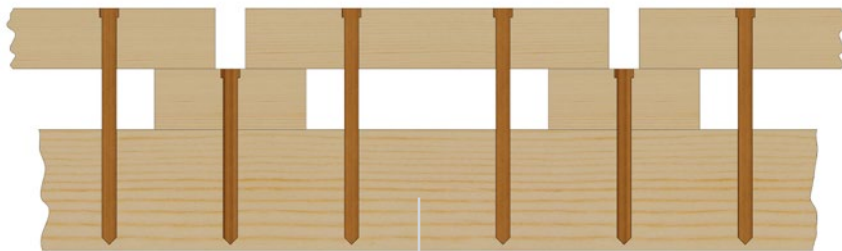

Façade in board-on-board cladding



Façade with board directly on substructure

