


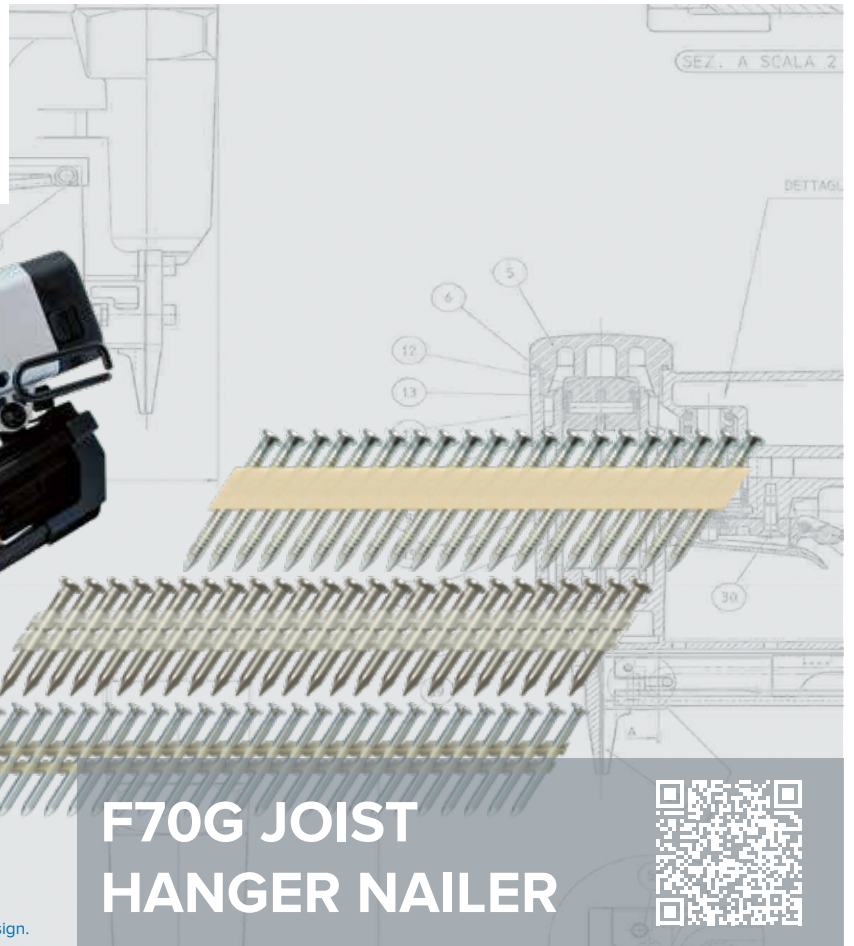

TRANSITION PERIOD: Product branding changes according to the new brand design.

TOOL- FEATURES

- Powerful cordless nailer for joist hanger nails
- Positive placement nose for metal connector plates
- Rubber comfort grip ensures a non-slip handling

JOIST HANGER NAILS

- Bright or electro-galvanized or hot dipped
- Heat treated for high strength and high shear forces



CONTACT & SERVICE

Our sales team
is available at:

P +43 7724 2111-671
sales@beck-fastening.com
www.beck-fastening.com

DESCRIPTION

- Belt hook
- Single shot actuation
- Works with FASCO® fuel cells
- Powerful NiMh battery
- Lights indicate battery charge

APPLICATIONS

- Metal connectors
- Roof joists
- Rafters & joists
- Trusses

HANDLING

1. Load fuel cell
2. Load fastener from the rear into the magazine
3. Connect battery
4. Clean and maintain gas tool regularly

TOOL CHARACTERISTICS

Height	Width
393 mm	108 mm
15.47 inch	4.25 inch
Length	Weight
360 mm	3.80 kg
14.17 inch	8.37 lbs

Shot limit

1000 Shots / Hour

Speed

2-3 Shots / Second

Gas type Liquid petroleum gas

Operating temperature

-7 / 49° C | 19 / 120° F

FASTENER DATA

Diameter	3.30 - 4.30 mm 0.129 - 0.169"
Length	38 - 64 mm 1 ½ - 2 ½"
Capacity	32
Nail Type	33° Joist Hanger Nails, Paper Tape & Plastic Strip

ACTUATION & LOADING

Actuation System:

Full Sequential Actuation

Loading: Rear Loading

VARIATIONS

- F54 JOIST/ANCHOR 34-60
(pneumatic tool)

BATTERY

Input Charge

220-240 VAC 50 Hz

Charge Time

2 hours

Capacity

1650 MaH

Voltage

6 VDC

Shots / Battery

Max. 5200

Shots / Fuel Cell

Max. 1200