



1) TOOL TYPE - GERAETETYP - DESCRIZIONE MACCHINA - TYPE D'OUTIL - TIPO DE MAQUINA
cod. 0R31888 HEAD CN15-PS90-H LIGNOLOC®

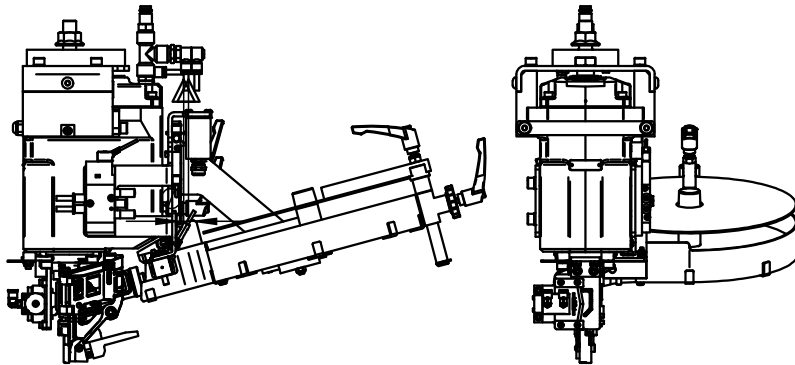

2) TOOL CHARACTERISTICS
SPEZIFICATION DES GERAETES
CARATTERISTICHE TECNICHE
CARACTÉRISTIQUES DE L'OUTIL
CARACTERÍSTICAS DE LA MAQUINA

HEIGHT HOEHE ALTEZZA HAUTEUR ALTURA	WIDTH BREITE LARGHEZZA LARGEUR ANCHURA	LENGTH LAENGE LUNGHEZZA LONGUEUR LONGITUD	WEIGHT GEWICHT PESO POIDS PESO
in. 17.16 mm. 436	in. 13.77 mm. 350	in. 21.05 mm. 534.5	lbs. _____ kg. _____
MIN-MAX WORKING PRESSURE MIN-MAX ARBEITSDRUCK MIN-MAX PRESSIONE DI ESERCIZIO MIN-MAX PRESSION DE TRAVAIL MIN-MAX PRESION DE TRABAJO		70 / 120 psi 5 / 8 BAR	
AIR CONSUMPTION PER CYCLE LUFTVERBRAUCH PRO NAGELUNG CONSUMO ARIA PER COLPO CONSUMATION DE L'AIRE PAR COUP CONSUMO DE AIRE CADA DISPARO		PERFORMANCES AT 90 psi (0.62 MPa) PRESTAZIONI A 6.2 BAR (0.62 MPa) 0.145 SCF 4.10 L.	
LUBRICANT SCHMIEROEL LUBRIFICANTE LUBRIFIANT LUBRIFICANTE		AEROSPACE LUBRICANTS TRIBOLUBE 12	

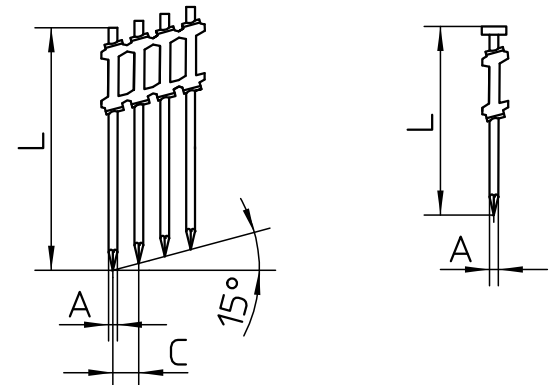

3) FASTENER DATA
ANGABEN ZU DEN BEFESTIGUNGSMITTELN
CARATTERISTICHE TECNICHE FISSAGGI
DONNÉES DES PROJECTILES
DATOS DE CLAVOS

	WITHOUT HEAD	WITH HEAD
A) WIRE SCHAFT FILO ALAMBRE TIGE	in. 0.185 - 0.209 mm. 4.7 - 5.3	in. 0.185 mm. 4.7
C) PITCH TEILUNG PASSO PAS PASO	in. 0.45 mm. 11.5	in. 0.45 mm. 11.5
L) LENGTH LAENGE LUNGHEZZA LONGUEUR LONGITUD	in. 2 1/2" - 3 - 3 1/2" mm. 65 - 75 - 90	in. 2 5/16" - 3 1/16" mm. 58 - 78
MAGAZINE CAPACITY MAGAZIN CAPAZITAET CAPACITA' CARICATORE CAPACITE' CHARGEUR CAPACIDAD CARGADOR	DIAMETER 260 mm	

* ACTUATION SYSTEM - AUSLÖSEART - ATTUAZIONE - MISE EN OEUVRE - ACTUACIÓN

0

* SEE INSTRUCTION MANUAL - SIEHE BETRIEBSANLEITUNG - VEDI MANUALE - VOIR MODE D'EMPLOI - VER EL MANUAL

NOISE CHARACTERISTICS
GERÄUSCH - EMISSION DATEN
CARATTERISTICHE RUMOROSITA'
CARACTÉRISTIQUES ACOUSTIQUE
CARACTERÍSTICAS DE RUIDO

EN 12549+A1:2008

$L_{WA,1s}$, :98.38 dB(A) - $K_{WA,1s}$, 2.5

EN ISO 4871:2009

$L_{pA,1s}$, :93.00 dB(A) - $K_{pA,1s}$, 2.5

* SEE INSTRUCTION MANUAL - SIEHE BETRIEBSANLEITUNG - VEDI MANUALE - VOIR MODE D'EMPLOI - VER EL MANUAL

VIBRATION VALUE
VIBRATIONSWERT
VALORE DI VIBRAZIONE
VALEUR DE VIBRATION
VALOR DE VIBRACIÓN

UNI ISO/TS
8662-11